


## Douilles terminales isolées selon DIN avec Easy-Entry, couleurs Français

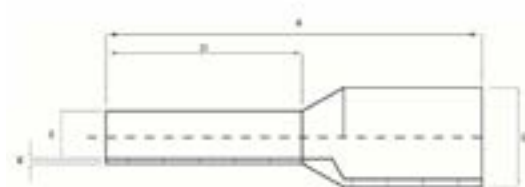

Pour conducteurs souples et très souples, par exemple selon DIN EN 60228 classe 5 et 6

MATIÈRE: Cu/étamé + Polypropylène PLGE C° MAX.: 105 ÉTAMÉ: Oui

| Art. nr. | MM <sup>2</sup> CÂBLE | DIM. A | DIM. D | DIM. E | DIM. G | COULEUR |
|----------|-----------------------|--------|--------|--------|--------|---------|
| 171/6    | 1                     | 11.5   | 6      | 1.4    | 3.4    | Rouge   |
| 177/18   | 16                    | 29     | 18     | 5.8    | 9.8    | Gris    |
| 178/18   | 25                    | 30     | 18     | 7.3    | 12     | Noir    |
| 168/8    | 0.34                  | 13     | 8      | 0.8    | 2.5    | Vert    |
| 174/12   | 4                     | 20     | 12     | 2.8    | 5.5    | Orange  |
| 178/22   | 25                    | 34     | 22     | 7.3    | 12     | Noir    |
| 172/6    | 1.5                   | 11.5   | 6      | 1.7    | 3.9    | Noir    |
| 174/18   | 4                     | 25.5   | 18     | 2.8    | 5.5    | Orange  |
| 169/8    | 0.5                   | 13     | 8      | 1      | 3.1    | Blanc   |
| 177/12   | 16                    | 23.5   | 12     | 5.8    | 9.8    | Gris    |
| 178/16   | 25                    | 28     | 16     | 7.3    | 12     | Noir    |
| 176/18   | 10                    | 27     | 18     | 4.5    | 8.4    | Brun    |
| 171/8    | 1                     | 13.5   | 8      | 1.4    | 3.4    | Rouge   |
| 173/18   | 2.5                   | 24     | 18     | 2.2    | 4.7    | Gris    |
| 167/6    | 0.25                  | 11     | 6      | 0.8    | 2.5    | Jaune   |
| 172/12   | 1.5                   | 18.4   | 12     | 1.7    | 3.9    | Noir    |
| 170/6    | 0.75                  | 11.5   | 6      | 1.2    | 3.2    | clair   |
| 166/8    | 0.14                  | 12.4   | 8      | 0.7    | 2.4    | Brun    |
| 172/10   | 1.5                   | 16.4   | 10     | 1.7    | 3.9    | Noir    |
| 172/18   | 1.5                   | 22.8   | 18     | 1.7    | 3.9    | Noir    |
| 173/12   | 2.5                   | 19     | 12     | 2.2    | 4.7    | Gris    |
| 168/6    | 0.34                  | 11     | 6      | 0.8    | 2.5    | Vert    |
| 173/8    | 2.5                   | 14.5   | 8      | 2.2    | 4.7    | Gris    |

| Art. nr. | MM <sup>2</sup> CÂBLE | DIM. A | DIM. D | DIM. E | DIM. G | COULEUR |
|----------|-----------------------|--------|--------|--------|--------|---------|
| 170/8    | 0.75                  | 13.5   | 8      | 1.2    | 3.2    | clair   |
| 174/10   | 4                     | 16.5   | 10     | 2.8    | 5.5    | Orange  |
| 175/12   | 6                     | 20     | 12     | 3.5    | 7      | Vert    |
| 172/8    | 1.5                   | 13.5   | 8      | 1.7    | 3.9    | Noir    |
| 176/12   | 10                    | 21.5   | 12     | 4.5    | 8.4    | Brun    |
| 169/6    | 0.5                   | 11     | 6      | 1      | 3.1    | Blanc   |
| 167/8    | 0.25                  | 13     | 8      | 0.8    | 2.5    | Jaune   |
| 166/6    | 0.14                  | 10.4   | 6      | 0.7    | 2.4    | Brun    |
| 175/18   | 6                     | 26     | 18     | 3.5    | 7      | Vert    |