


Manchons à vis en aluminium sans paroi

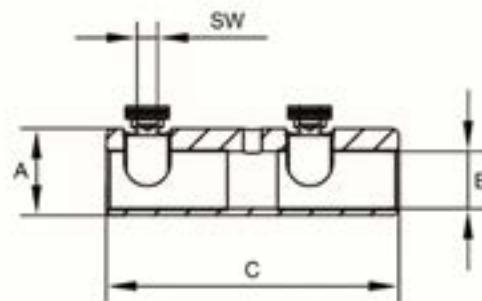

Manchons à vis en aluminium avec vis de cisaillement détachable et corps de serrage sans paroi interne, étamé pour une conductivité optimale.

MATIÈRE: Aluminium BOUCHON D'HUILE: -

Art. nr.	MM ² CÂBLE	# VIS	DIM. A	DIM. B	DIM. C	SW	ÉTAMÉ
209135	6 RE - 50	2	18	10.5	40	5	√
209019	16 - 50 RE 16 - 95 RM 50 - 95 SE 35 - 70 SM / 95 SM(r)	2	25	14.4	55	5	-
298100	6 - 35 RE 6 - 25 RM	2	14	7.2	40	4	√
298129	10 - 70 RE 10 - 70 RM 50 - 70 SE 35 - 70 SM	2	22	12.5	57	5	√
298325	25 - 150 RE 25 - 150 RM 50 - 120 SE / 150 SE (90°)	2	28	16.9	70	6	√
209092	6 - 35 RE 6 - 25 RM	2	14	7.2	40	4	√
298324	25 - 150 RE 25 - 150 RM 50 - 120 SE / 150 SE (90°)	2	28	16.9	70	6	√
209088	35 - 50 RE 35 - 185 RM 50 - 150 SE / 185 SE (90°) 35 - 150 SM / 185 SM(r)	2	32	19.6	80	6	√
209087	16 - 50 RE 16 - 95 RM 50 - 95 SE 35 - 70 SM / 95 SM(r)	2	25	14.4	55	5	√
209058	Cu 2.5 SM / 50 RM(v) Al 6 - 35 SM / 50 RM(v)	2	16.5	9	40	4	-
298322	10 - 70 RM 10 - 70 RM 50 - 70 SE 35 - 70 SM	2	22	12.5	57	5	√

Art. nr.	MM ² CÂBLE	# VIS	DIM. A	DIM. B	DIM. C	SW	ÉTAMÉ
209020	35 - 50 RE 35 - 185 RM 50 - 150 SE / 185 SE (90°) 35 - 150 SM / 185 SM(r)	2	32	19.6	80	6	-
298152	Cu 2.5 - 35 SM / 50 RM(v) Al 6 - 35 SM / 50 RM(v)	2	16.5	9	40	4	√
209099	Cu 2.5 - 35 SM / 50 RM(v) Al 6 - 35 SM / 50 RM(v)	2	16.5	9	40	4	√
298062	35 - 50 RE 35 - 185 RM 50 - 150 SE / 185 SE (90°) 35 - 150 SM / 185 SM(r)	2	32	19.6	80	6	√
209013	6 - 35 RE 6 - 25 RM	2	14	7.2	40	4	-
209131	6 RE - 50	2	14	18	10.5	5	√
298255	35 - 50 RE 35 - 185 RM 50 - 150 SE / 185 SE (90°) 35 - 150 SM / 185 SM(r)	2	32	19.6	80	6	√
209126	25 - 150 RE 25 - 150 RM 50 - 120 SE / 150 SE (90°)	2	28	16.9	70	6	-
298061	16 - 50 RE 16 - 95 RM 50 - 95 SE 35 - 70 SM / 95 SM(r)	2	25	14.4	55	5	√
298244	120 - 150 RE 120 - 240 RM 120 - 240 SE 120 - 240 SM	4	38	25	128	6	√